

Vesconite Hilube Production List

Vesconite Hilube is a premium ultra low friction grade of Vesconite, specially compounded to give much longer service life. It is particularly suited to unlubricated or water lubricated conditions.

Bushing

1m lengths

Outside x Inside Diameters (mm)

15 x 7	75 x 60	180 x 160
20 x 10	80 x 35	205 x 150
25 x 15	80 x 50	205 x 170
30 x 20	80 x 60	220 x 190
35 x 20	80 x 70	225 x 160
35 x 25	90 x 35	225 x 170
35 x 30	90 x 50	225 x 190
40 x 20	90 x 70	250 x 190
40 x 25	90 x 80	250 x 215
40 x 30	100 x 35	260 x 170
45 x 25	100 x 60	260 x 215
45 x 35	100 x 75	260 x 225
50 x 20	110 x 70	275 x 190
50 x 25	110 x 90	275 x 215
50 x 30	110 x 100	300 x 200
50 x 35	120 x 60	300 x 250
50 x 40	120 x 75	300 x 275
55 x 35	120 x 90	325 x 215
55 x 40	120 x 100	325 x 275
60 x 35	130 x 70	350 x 250
60 x 40	130 x 85	350 x 300
60 x 45	130 x 100	375 x 325
60 x 50	140 x 100	420 x 350
65 x 25	155 x 75	420 x 375
65 x 35	155 x 100	460 x 350
65 x 45	155 x 125	460 x 400
65 x 50	160 x 140	480 x 375
70 x 25	165 x 125 (F)	525 x 425
70 x 35	170 x 125	575 x 450
70 x 50	180 x 100	587 x 457
75 x 50	180 x 140	600 x 450

Rods

1m lengths

Diameters (mm)

8 mm
10 mm
12 mm
16 mm
18 mm
20 mm
25 mm
27 mm
30 mm
35 mm
40 mm
45 mm
50 mm
55 mm
60 mm
65 mm
70 mm
75 mm
80 mm
90 mm
100 mm
110 mm
115 mm
125 mm
135 mm
150 mm
160 mm

Machined Plates

200mm wide, 1m lengths

Thickness (-0.0/+0.3 mm)

2 mm
3 mm
5 mm
6 mm
8 mm
10 mm
12 mm
15 mm
16 mm
20 mm
25 mm
30 mm
35 mm
40 mm
50 mm
75 mm

Machined Plates

400mm wide, 500mm lengths

Thickness (-0.0/+0.3 mm)

3 mm
5 mm
8 mm

Machined Plates

600mm wide, 1m lengths

Thickness (-0.0/+0.5 mm)

10 mm
16 mm
20 mm
25 mm
40 mm



Johannesburg Sales Tel (+ 27 11) 616 11 11
Fax (+ 27 11) 616 22 22

Virginia Sales Tel (+ 27 57) 212 00 00
Fax (+ 27 57) 212 66 66

Website www.vesconite.com

E-mail vesconite@vesconite.com

Phone	Toll Free	Fax
USA	1 866 635 75 96	(212) 937 31 84
UK	0800 731 97 45	0207 681 3444
Canada	1 866 682 34 84	(416) 352 15 27

Rods and bushing will machine to the stated nominal diameter.

Standard lengths are 1000mm.

Non-standard lengths (up to 3m) or short lengths are subject to a surcharge.

Sizes marked F are discontinued sizes and are available until existing stocks are sold out.


Special sizes can be produced subject to tooling charges and production order.

Custom components manufactured in small to large quantities, including bushes, washers, discs, plates, slides and strips.

Vesconite Hilube

- Advanced Vesconite
- Longest wear life
- Lowest friction
- For unlubricated applications
- No stick-slip
- Exceptionally low wear when lubricated
- Ideal for slow moving, heavy loads with fine clearances, dirty or unlubricated

Earthmoving
suspension bushes

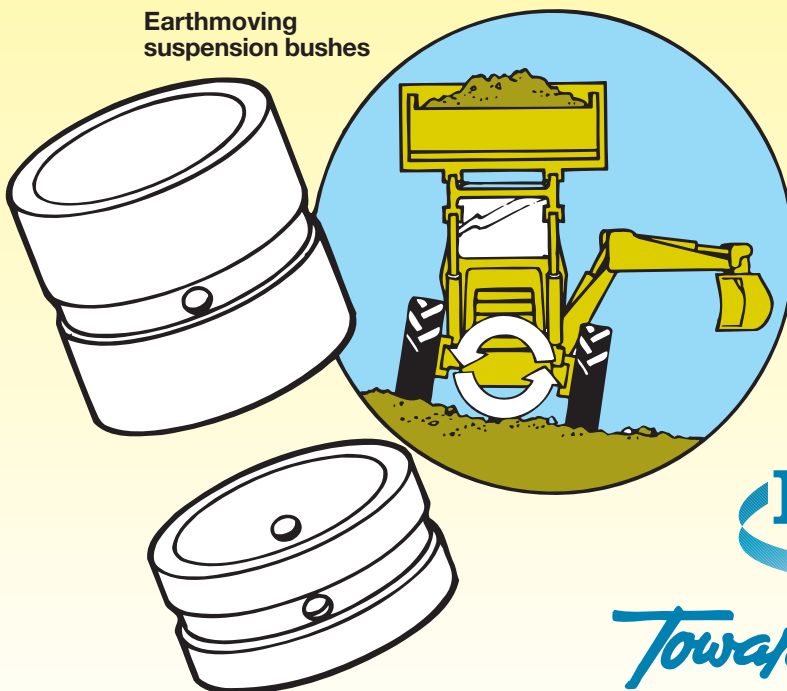

**VESCO
PLASTICS
SALES**

Towards Zero maintenance